

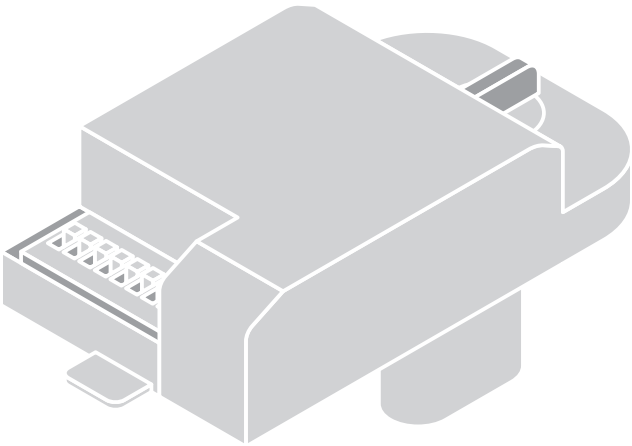
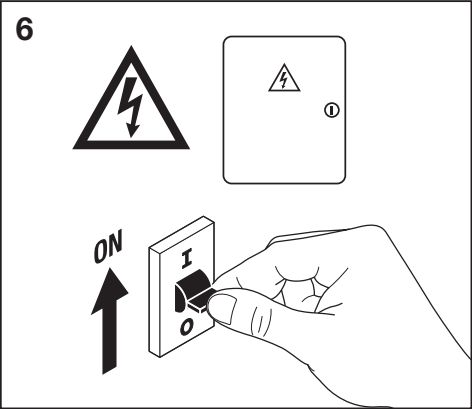
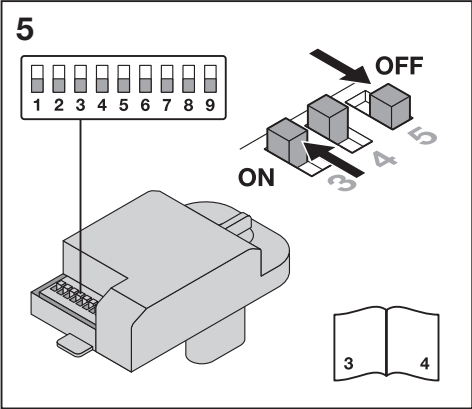
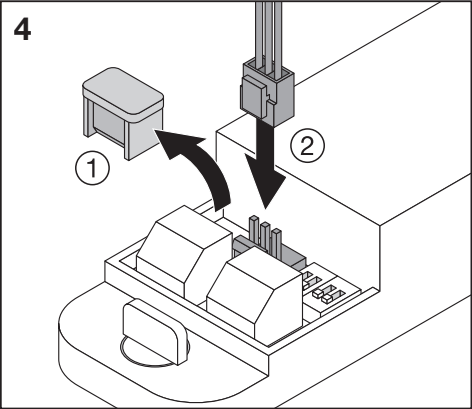
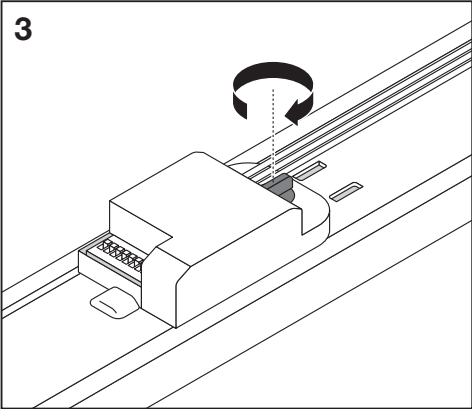


DP BATTEN COMBO SENSOR

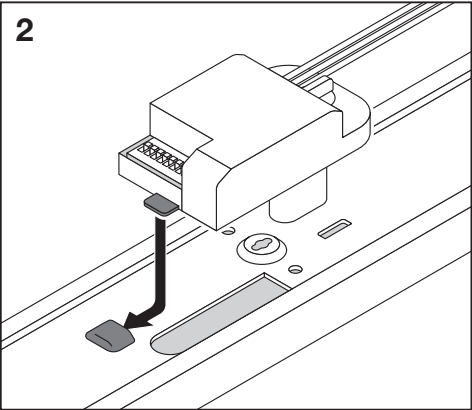


	EAN	l x w x h [mm]	
DP BATTEN CBO SENSOR	4099854521461	82 x 44 x 35	40g

DP BATTEN COMBO SENSOR

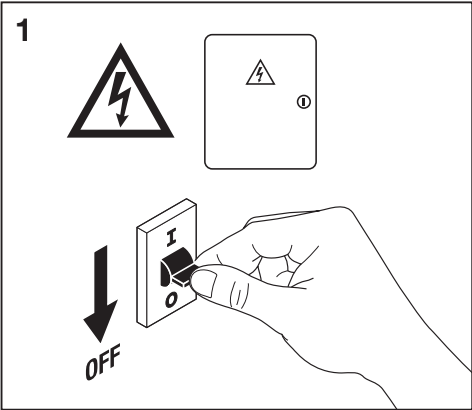

DP BATTEN COMBO SENSOR

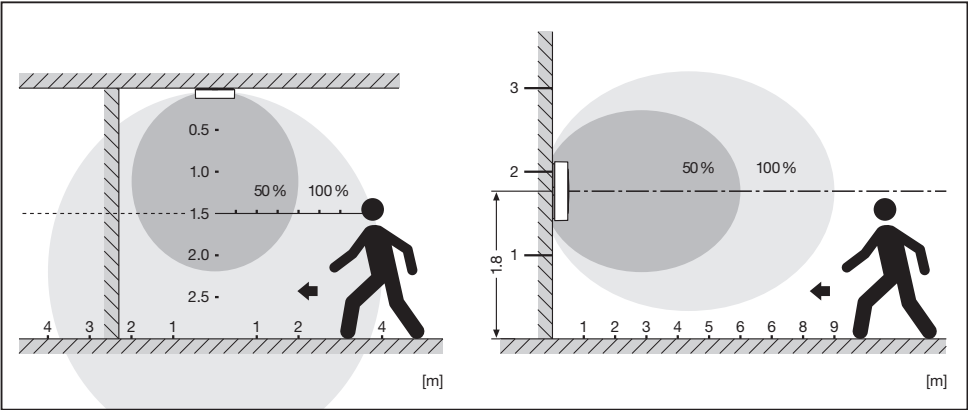

On/Off

1

2

3

4

5

6

7

8

9

ON

OFF

Detection Area

1	2	
ON	ON	100%
-	ON	75%
ON	-	50%
-	-	25%

Hold Time

3	4	5	
ON	ON	ON	5s
-	ON	ON	90s
ON	ON	-	5min
-	-	-	15min

Daylight Sensor

6	7	8	
ON	ON	-	Disable
-	-	ON	<50 LUX
ON	-	ON	<25 LUX
-	ON	ON	<10 LUX
ON	ON	ON	<2 LUX

Sensor Mode

9	
ON	Dimming
-	ON/OFF

A¹⁾

<50lux

ON (100%)

90SEC

OFF (0%)

B¹⁾

Disable

ON (100%)

15MIN

OFF (0%)

3

Dimming



1	
ON	100%
-	50%



Hold Time

2	3	
ON	ON	5s
-	ON	90s
ON	-	5min
-	-	15min



Daylight Sensor

4	5	
ON	ON	Disable
-	ON	<50 LUX
ON	-	<25 LUX
-	-	<10 LUX



DIM Period

6	7	
ON	ON	0s
-	ON	10s
ON	-	15min
-	-	∞





DIM Level

8	
ON	10%
-	30%



Sensor Mode

9	
ON	Dimming
-	ON/OFF

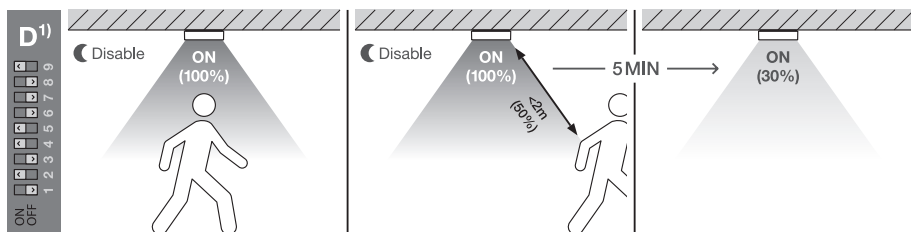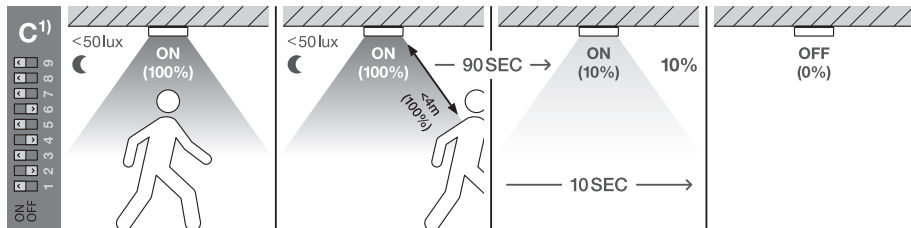

- (GB) 1) Example (D) 1) Beispiel (F) 1) Exemple (I) 1) Esempio (E) 1) Ejemplo (P) 1) Exemplo
 (GR) 1) Παράδειγμα (NL) 1) Voorbeeld (S) 1) Exempel (FIN) 1) Esimerkki (N) 1) Eksempel (DK) 1) Eksempel
 (CZ) 1) Příklad (RU) 1) Пример (H) 1) Példa (PL) 1) Przykład (SK) 1) Příklad (SI) 1) Primer (TR) 1) Örnek (HR) 1) Primjer
 (BG) 1) Пример (EST) 1) Näide (LT) 1) Pavyzdys (LV) 1) Piemērs (SRB) 1) Primer (UA) 1) Приклад (KZ) 1) Мысал



LEDVANCE SASU
 CQM, 5 rue d'Altorf
 67120 Molsheim France
www.ledvance.com

(GB) LEDVANCE Ltd, Sterling House,
 810 Mandarin Court, Warrington,
 Cheshire, WA1 1GG, United Kingdom

C10449058
 G11226250
 10.03.25