


DAMPPROOF 5X THROUGHWIRING IP65





LEDVANCE

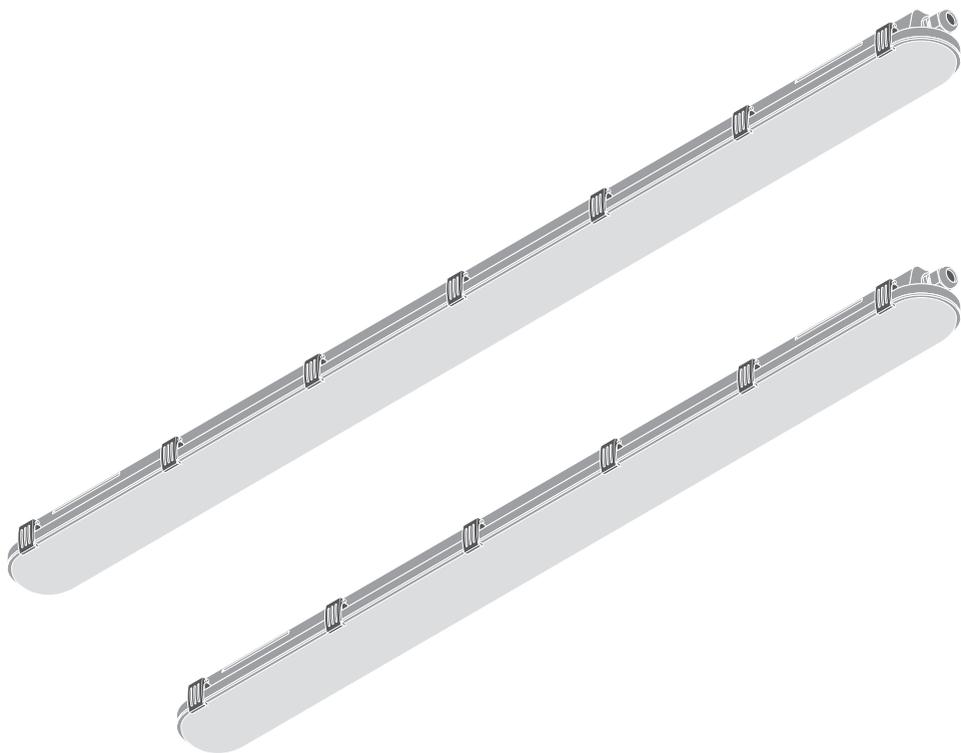

	EAN	l x w x h [mm]	W	VAC	Hz	lm	lm/W	K
DP 5TH 1200 32W 840 IP65 GY	4058075541924	1200 x 82 x 68	32	220-240 V	50/60 Hz	4400	135	4000
DP 5TH 1500 46W 840 IP65 GY	4058075541948	1500 x 82 x 68	46	220-240 V	50/60 Hz	6400	135	4000
DP 5TH 1500 58W 840 IP65 GY	4099854312465	1500 x 82 x 68	58	220-240 V	50/60 Hz	8000	135	4000
DP 5TH 1500 81W 840 IP65 GY	4099854312489	1500 x 82 x 68	81*	220-240 V	50/60 Hz	11000*	135*	4000


	EAN	IP	IK	∇	R _a	🌡️ (°C)	PF	👤
DP 5TH 1200 32W 840 IP65 GY	4058075541924	65	08	110	> 80	-25...+40	> 0.9	1.6 kg
DP 5TH 1500 46W 840 IP65 GY	4058075541948	65	08	110	> 80	-25...+40	> 0.9	1.9 kg
DP 5TH 1500 58W 840 IP65 GY	4099854312465	65	08	110	> 80	-25...+40	> 0.9	1.9 kg
DP 5TH 1500 81W 840 IP65 GY	4099854312489	65	08	110	> 80	-25...+40	> 0.9	1.9 kg

DAMPPROOF 5X THROUGHWIRING IP65

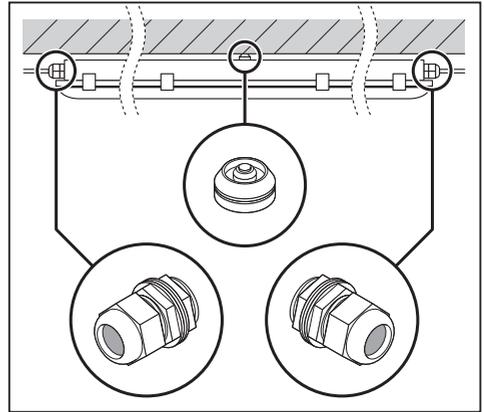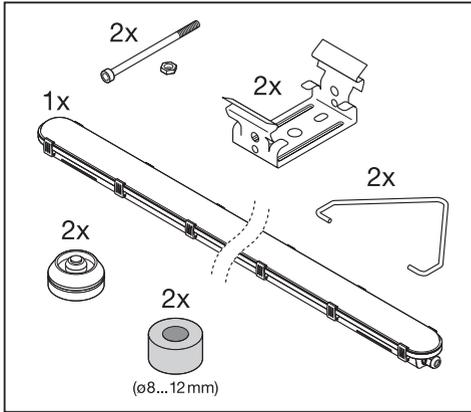

1x DAMPPROOF 5TH IP65 2x DAMPPROOF 5TH IP65 3x DAMPPROOF 5TH IP65 ... nx DAMPPROOF 5TH IP65









n	B16	C10	C16
	DP 5TH 1200 32W	27	24
DP 5TH 1500 46W	26	23	37
DP 5TH 1500 58W	26	23	38
DP 5TH 1500 81W	13	16	26







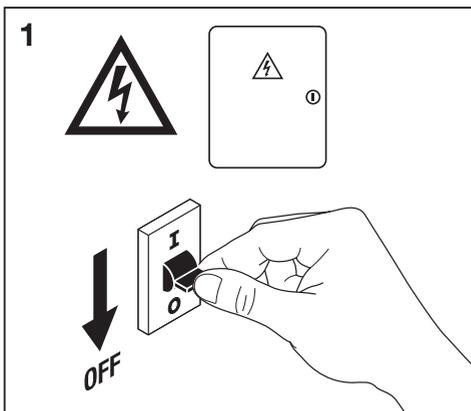


2

[mm]	X	Y
DP 1200	27 ± 1	850 ± 100
DP 1500	27 ± 1	1120 ± 100

DAMPPROOF 5X THROUGHWIRING IP65

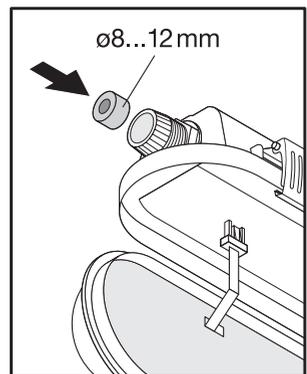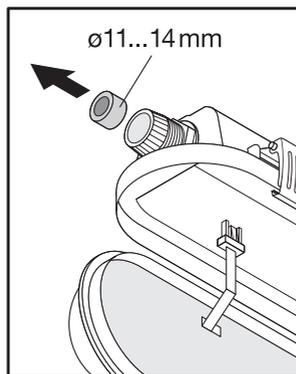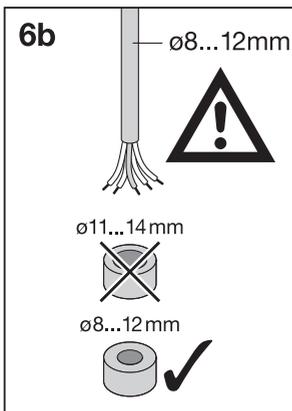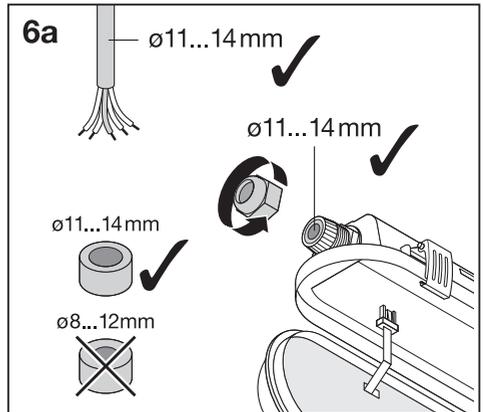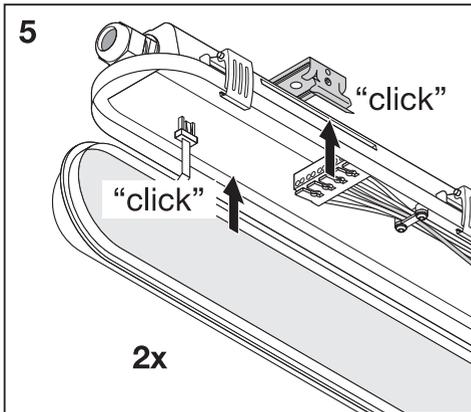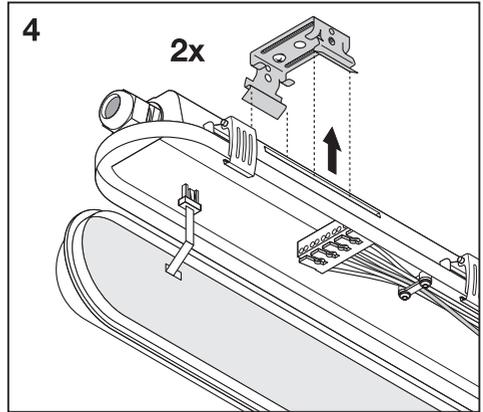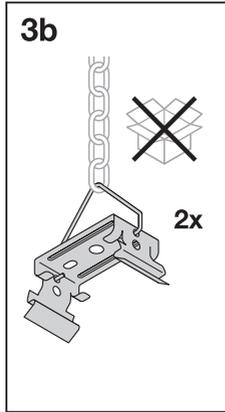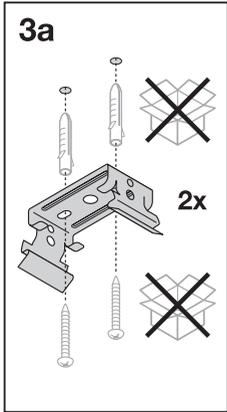

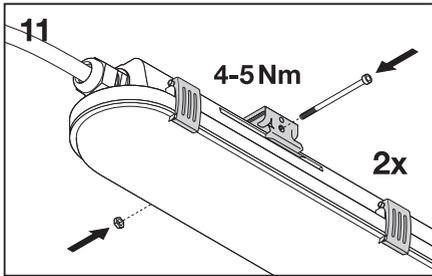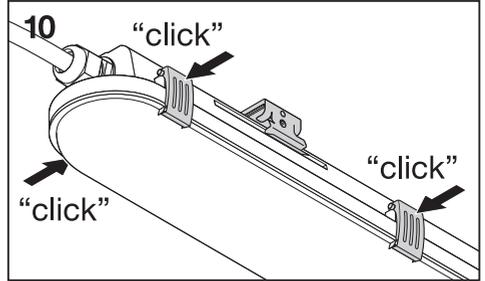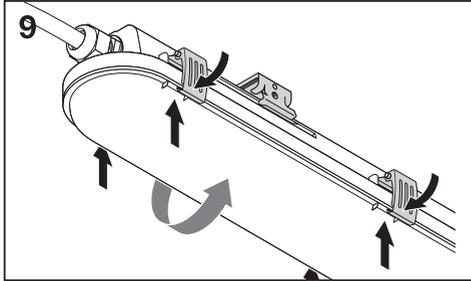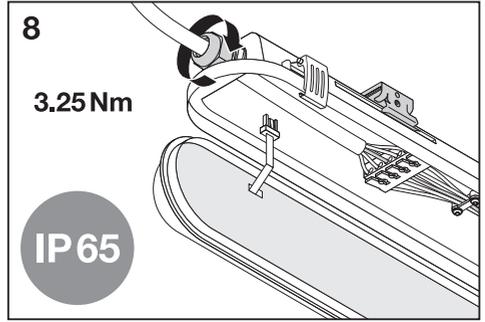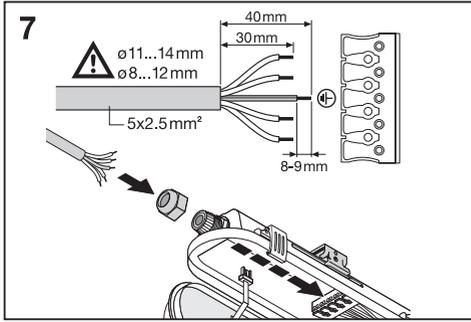

* DP 5TH 1500 81W 840 IP65 GY

230V  LED	PIN1		PIN2		W	lm	lm/W	Input current driver [mA]	Output current [mA]
	ON \leftrightarrow OFF	2 1	ON \leftrightarrow OFF	2 1					
	ON	ON	ON	ON	81	11000	135	390	350
	ON	OFF	OFF	ON	69	9600	139	340	300
	OFF	ON	ON	OFF	57	8200	143	280	250
	OFF	OFF	OFF	OFF	46	6600	143	230	200



G11140181

13.05.24

LEDVANCE GmbH
 Steinerne Furt 62
 86167 Augsburg, Germany
www.ledvance.com

© LEDVANCE Ltd, Sterling House,
 810 Mandarin Court, Warrington,
 Cheshire, WA1 1GG, United Kingdom