


SUBMARINE®

INTEGRATED SLIM

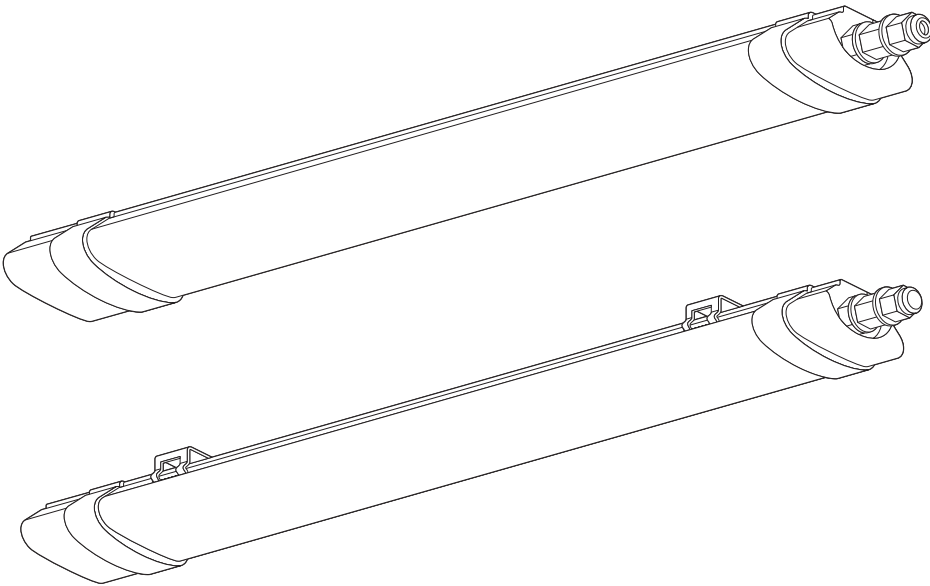

	EAN	W	lm light source	lm output	K	IP	° (°C)	V~	mA	Hz	PF	⬮ (kg)	▽ (°)	📄👉
SUBMARINE I SLIM VALUE 0.6M 840	4099854428975	10	1200	900	4000	65	-20...+35	220-240	100	50/60	>0.5	0.2	120	25000
SUBMARINE I SLIM VALUE 1.2M 840	4099854428999	18	1900	1600	4000	65	-20...+35	220-240	170	50/60	>0.5	0.3	120	25000
SUBMARINE I SLIM VALUE 1.5M 840	4099854429019	24	3000	2160	4000	65	-20...+35	220-240	230	50/60	>0.5	0.4	120	25000

SUBMARINE® INTEGRATED SLIM

