



ADUOSMART ERIA


USER MANUAL Switch build in module




1. Switch off the main power.




2. Ceiling Installation:
Remove the existing lighting:
Detach the existing lighting
and disconnect the wires.
Do not exceed the maximum
load of **2300W**.



3. Connect the live and
neutral wire to **"IN"**
connect the **live wire**
to the **right [L] terminal**.
Connect the **neutral wire**
to the **right [N] terminal**.
Tighten the clamping
screws.




4. Connect 2 wires to **"OUT"**
2 wires to the **inner [L]** and **[N] contact**.
Tighten the clamping
screws.

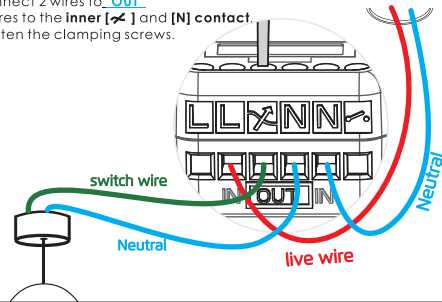


5. Wall installation


Remove the existing wall switch.
This receiver is a replacement for
the existing wall switch and it is
not suitable if the existing light
switch is interconnected to the
other light switches for multi
way switching.
Do not exceed the maximum
load: **2300W**.



6. Connect the live wire and switch wire:
Connect the **live wire** to the **[L] contact**.
Connect the **switch wire** to the **[S] contact**.
Tighten the clamping
screws.

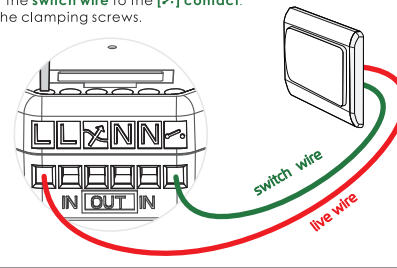


7. If the light is controlled by the live wire and the neutral wire:
Connect the **live wire** to the **left [L] contact**.
Connect the **neutral wire** to the **left [N] or right [N] contact**.
Connect the **switch wire** to the **[S]**.

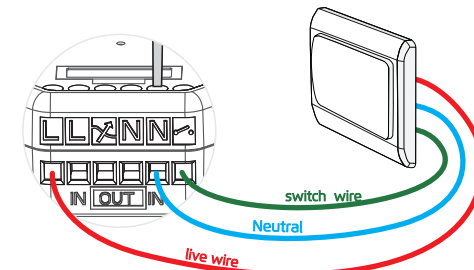

8. **Risk of shock!** be careful do not
touch any exposed wiring.

Switch on the main power to continue.




Connect with the ERIA hub

9A. Download the Adurosmart App from the Apple App Store or from
Google Play or go to <http://adurosmart.com/adurosmart-app/>




9B. If you have a **third party ZigBee compatible hub** then **proceed to step 16**.


10. Open the Adurosmart Eria APP.




11. On the bottom right corner
press on "Settings".

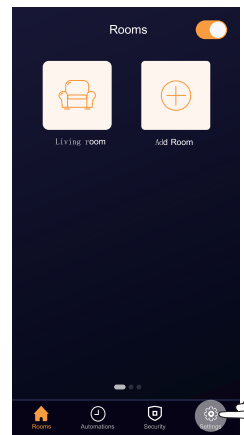


12. Select "Devices".

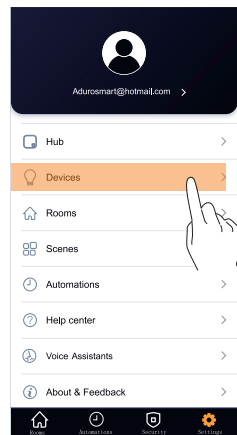


13. On the top right corner
press on the "+" symbol
then press on "Add device".

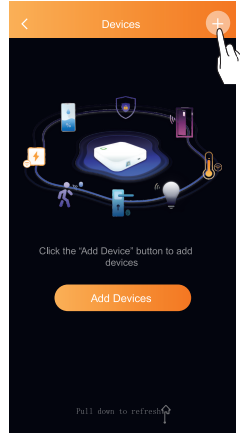


14. Press on "Brands" and then
select "Adurosmart ERIA".

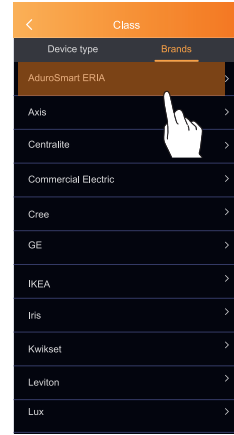

15. Press on "on/off module"

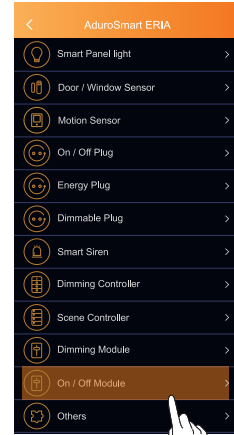


16. To set the device into pairing
mode use the pin to press the
button for 2 seconds.
The device will then go
into pairing mode.



16B. If you have a **third party hub**,
then this is the moment to **initiate**
the search from your Smart Home
hub app.

17. Proceed by pressing on "Search"
to allow the ERIA hub to find the
relay. the LED indicator on the
hub will **flash green** this indicates
that the hub is searching for new
devices.

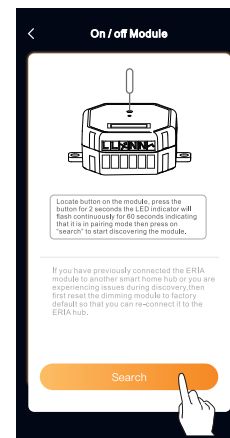


18. When the relay has been found
and paired successfully it will
show up in your search results,
press on "Done" to complete
the process.



19. **Troubleshoot**

If you are experiencing issues during pairing,
then follow below instructions
to reset the relay.

Locate the button on the module, press the button for 10 seconds and
the LED indicator will flash quickly to confirm the reset.



10seconds.

NEED HELP? CALL US

For troubleshoots, instruction video's or more information
please visit us at www.adurosmart.com/faq

Chat with one of our support agents at
www.adurosmart.com

The Netherlands: +31 523687532
Support@Adurosmart.eu



www.adurosmart.com/manuals/switchbuildinmodule