



QUICK START GUIDE HomeBase Professional S1



User Manual/
Video/Support



What's in the Box




Tools/Devices You will Need



Hard Drive

At a Glance

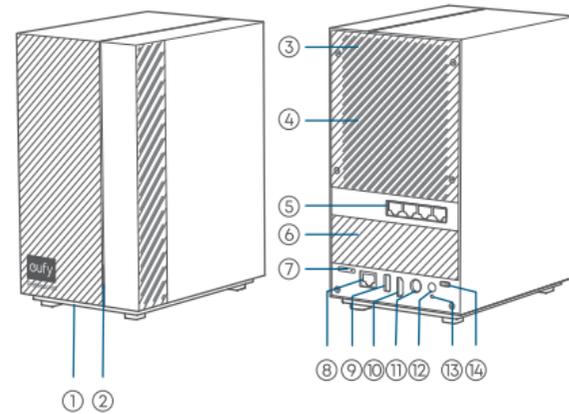


- ① Alarm Siren
- ② Status LED
- ③ Speaker
- ④ AI Card Bracket
- ⑤ PoE Ports
- ⑥ Hard Drive Bay
- ⑦ SIM Card Slot
- ⑧ Ethernet Port
- ⑨ USB-A Port
- ⑩ HDMI Port
- ⑪ Power Port
- ⑫ SYNC/ALARM OFF Button
- ⑬ Reset Hole
- ⑭ USB-C Port


Setting Up the System

You will need to complete the setup of the HomeBase before adding other devices to the alarm system.


1. Power on and connect the HomeBase to your router's LAN port.

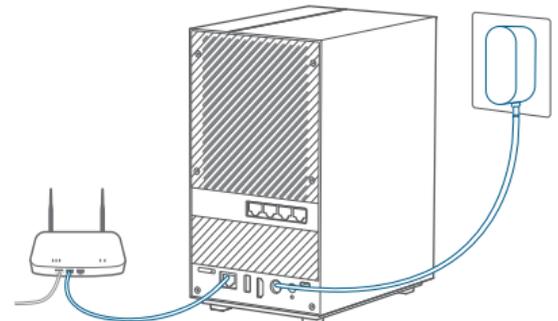

2. The LED indicator will turn blue (This may take about 1 min) when the HomeBase is ready for setup.

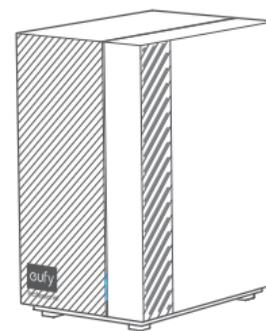

3. Download the eufy app, and sign in or create an account.



4. Tap the + icon on the app, and select **HomeBase Professional** in the Device Family, and follow in-app instructions to complete the setup.

Expanding HomeBase Storage (Optional)

HomeBase Professional comes with 32GB of storage for saving events. For continuous video recordings, you can install a hard drive (up to 16TB) to expand storage.

Step 1. Prepare Your Hard Drive


Before you start, transfer **all** the data in your hard drive to a secure location before adding it to HomeBase Professional.

Type	Hard disk drive (HDD) or solid-state drive (SSD) that uses the SATA interface
Size	3.5 inch
Capacity	Up to 16TB
Recommended	Surveillance Hard Drive from Western Digital or Seagate


Step 2. Install the Hard Drive

HomeBase Professional must be powered off when you install or remove the hard drive.


1. Press and hold the SYNC/ALARM OFF button for 10 seconds to turn off the HomeBase.

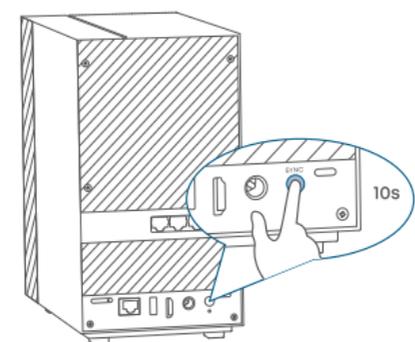


2. Unscrew and remove the back cover of the HomeBase.

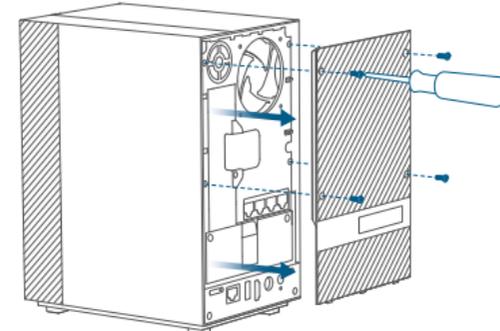


3. Remove the 2 screws from the hard drive bay.

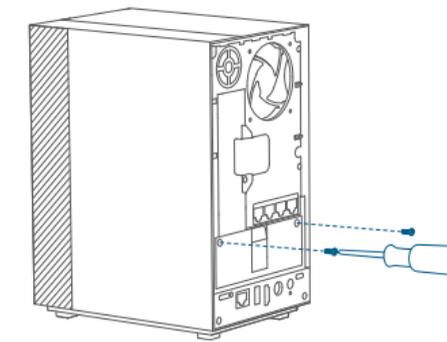


4. Hold the bay handle and pull out the hard drive bay.

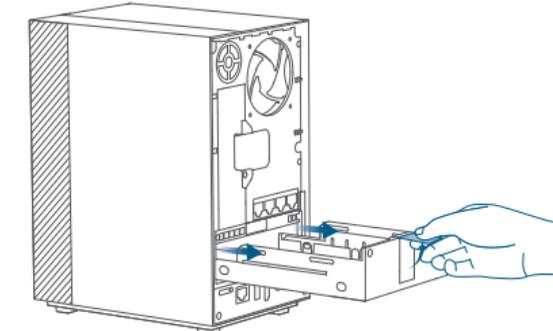


5. Slide the hard drive into the bay until it fits snugly against the back of the bay, ensuring there is no gap, and secure it using the provided screws.

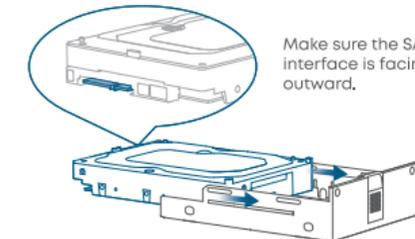


Make sure the SATA interface is facing outward.

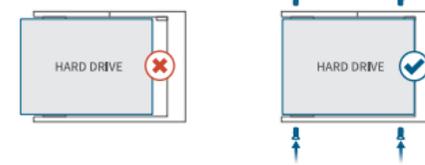

6. Insert the hard drive bay back into the HomeBase, and secure with the screws.

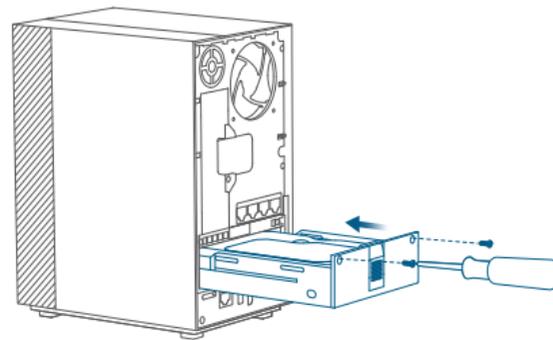

7. Place the back cover back to the HomeBase, and secure with screws.

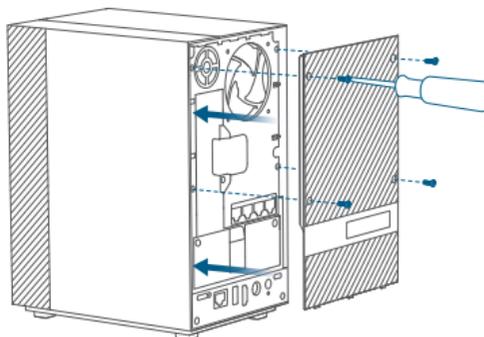


Expanding AI capacity (Optional)


HomeBase Professional comes with a chip for edge computing. You can also add another AI card (sold separately) to expand the AI capacity.

⚠ HomeBase Professional must be powered off when you install or remove the AI card.


1. Press and hold the SYNC/ALARM OFF button for 10 seconds to turn off the HomeBase.

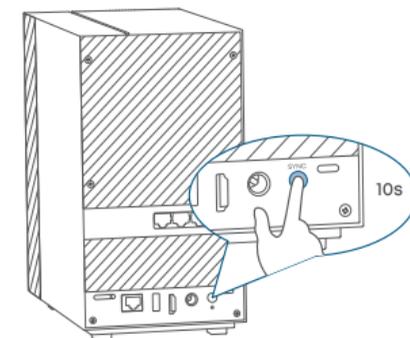


2. Unscrew and remove the back cover of the HomeBase.

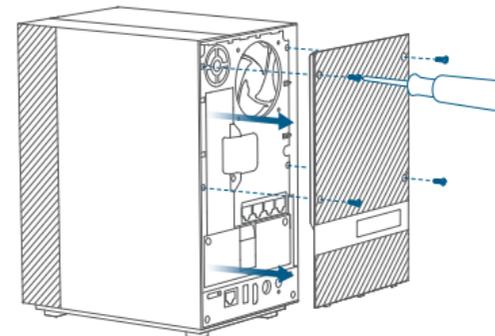

3. Insert the AI card into the AI card bracket, and secure with a screw.

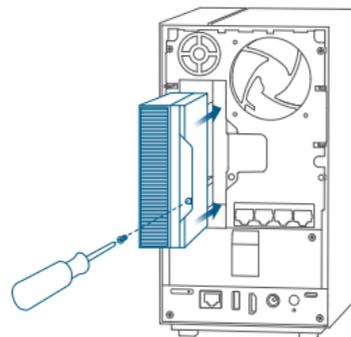

4. Place the back cover back to the HomeBase, and secure with screws.

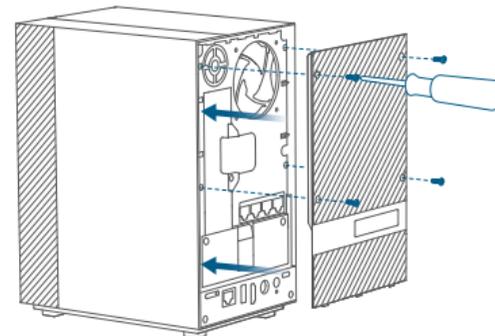

Important Safety Information

1. Unless specifically indicated that it is safe to do so in the user guide or instruction manual, do not use this device in an environment that exceeds the recommended low or high temperature.
2. Unless specifically indicated that it is safe to do so in the user guide or instruction manual, avoid exposing your device to direct sunshine or excessively wet environments.
3. The recommended temperature range for devices and accessories is -10°C to 40°C (14°F to 104°F).
4. When supplying, please place the device in an environment that has a normal room temperature and good ventilation.
5. Do not use the product in any way other than described herein in order to avoid personal injury or property damage.
6. User should comply with the laws and regulations of the corresponding countries and regions where the equipment is located (used), abide by professional ethics, pay attention to safety obligations, and strictly prohibit the use of our products or equipment for any illegal purposes. Our company will not be responsible for any violators' legal liability under any circumstances.
7. The adapter shall be installed near the equipment and shall be easily accessible.
8. Please ensure to use only the adapter offered by the manufacturer. Using unauthorized adapter may cause danger and violate the authorization of the device and the guarantee article.
9. This adapter is for indoor use only. The adapter type (for HomeBase Pro) is HKA12048025-7E, rated output voltage/current is 48 Vdc/2.5A. The plug is considered as disconnect device of adapter.

Warning

- Replacement of a battery with an incorrect type that can defeat a safeguard;
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- Leaving a battery in an extremely high temperature

surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; and

- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

⚠ CAUTION!
THERE IS A RISK OF EXPLOSION IF AN INCORRECT BATTERY TYPE IS USED.
DISPOSE OF USED BATTERIES ACCORDING TO THEIR INSTRUCTIONS.

Notice

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure condition. The min separation distance is 20cm. The following importer is the responsible party
Company Name: POWER MOBILE LIFE, LLC
Address: 10800 NE 8TH ST #900, BELLEVUE, WA, 98004, UNITED STATES
Telephone: 1-800-988-7973

IC Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class B digital apparatus complies with Canadian ICES(B).

IC Radiation Exposure Statement

When using the product, maintain a distance of 20cm from the body to ensure compliance with RF exposure requirements.

 Your product is designed and manufactured with high-quality materials and components, which can be recycled and reused.

HDMI™

HIGH-DEFINITION MULTIMEDIA INTERFACE

The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

Customer Service

 12-month limited warranty

 (US) +1 (888) 3839-123

 support.expert@eufy.com (US)
support.au.eufy.com (AU)

Anker Innovations Limited
Unit 56, 8th Floor, Tower 2, Admiralty Centre,
18 Harcourt Road, Hong Kong

 @EufyOfficial

 @EufyOfficial

 @EufyOfficial