


SL264 Warmglow LED Recessed Spot

Mounting Instructions

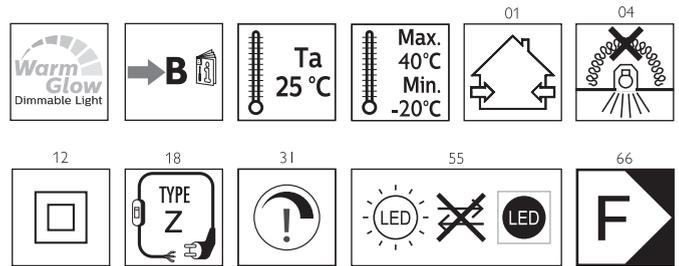

Product Type	Product Description	Lum. Power	CCT	Total Lumen		Beam Angle	CRI	Vol./Freq.	Classification	ΦA	B	Cut-out ΦC
9290026636	IMPALA WGDIM SL264 RD 068 6W 27K WH	6W	2200-2700K	500lm	0.195	36°	80	220-240V ~, 50/60Hz	Class II	Φ92	48	Φ68-78
9290026637	IMPALA WGDIM SL264 RD 068 6W 27K BL											

Cut-out ΦC

OFF

Luminaire cable :
2x0.75 mm²

(L) -Brown
(N) -Blue

Connect the luminaire to the power supply cable with a terminal box (Installation must be performed by a qualified person).

Product	X(mm)	Y(mm)	Z(mm)
SL264	50	1-20	4

Installation

Product	Inom (Run current)(mA)	Ipeak (A)	Tref (ms)	AC Leakage Current (mA)	MCB (Type B 16A, pcs)	MCB (Type C 16A, pcs)
9290026636	33	1	0.072	<0.7	100	100
9290026637						

- Please read this manual before you start to install the luminaire.
- The luminaire is complied with IEC60598-1, IEC60598-2-2.
- The luminaire shall be installed by a qualified electrician according to specified step, and wired in accordance with the latest IEE electrical regulations or the national requirements.
- TURN OFF the power during installation or maintenance to avoid electrical shock.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as Sulphur, Chlorine, Phthalates, etc., are present.

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

