

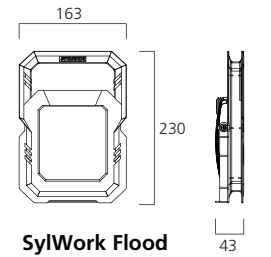
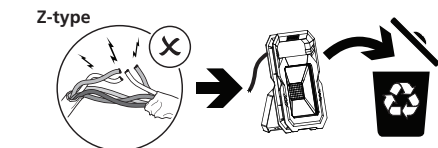
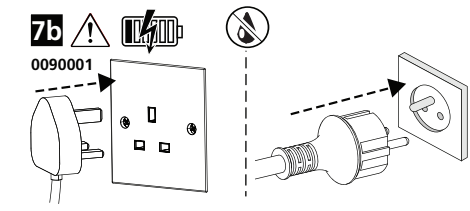
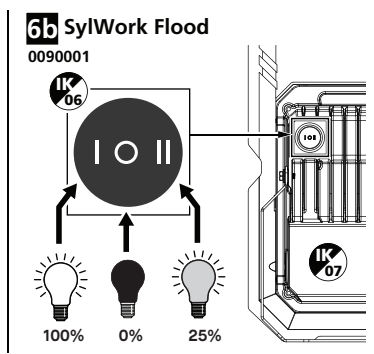
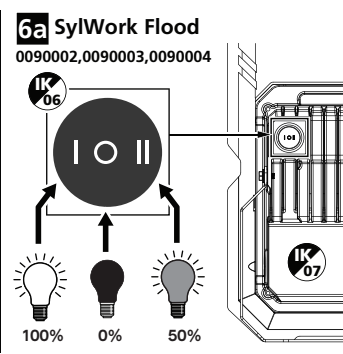
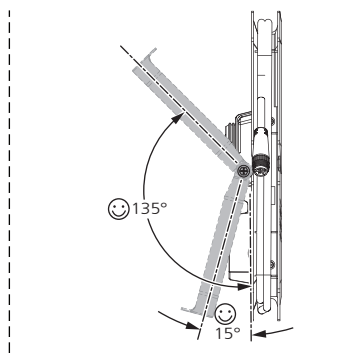
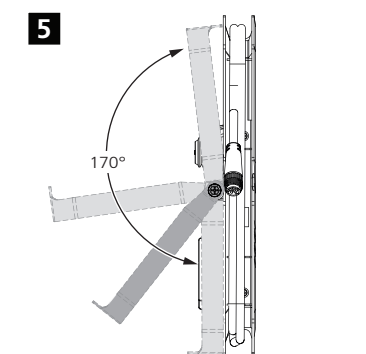
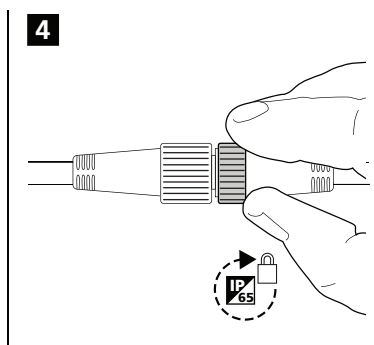
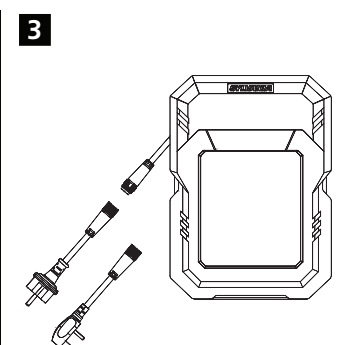
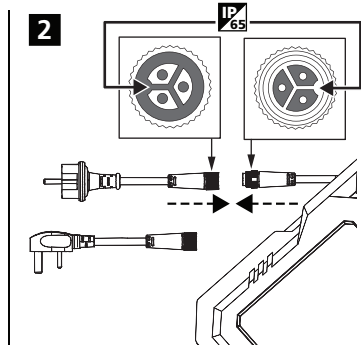


SylWork Flood
0090001, 0090002

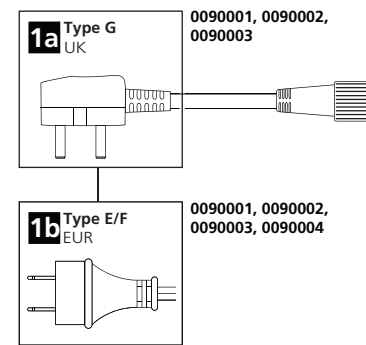

SylWork Flood
0090003, 0090004

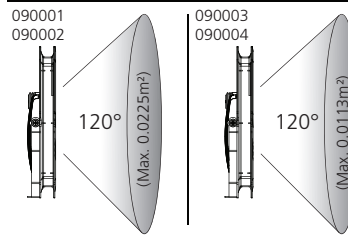

SylWork Flood	Power		@4000K		Kg Weight	
	I	II	I	II		
0090001	45W	15W	AC+DC	5000 lm	1500 lm	1.75kg
	40W	10W	AC	5000 lm	1500 lm	
	8W	2W	Discharge	1200 lm	300 lm	
0090002	50W	25W	/	5000 lm	3000 lm	1.55kg
0090003	30W	15W	/	3000 lm	1700 lm	0.95kg
0090004	20W	10W	/	2000 lm	1200 lm	0.95kg

Operation Mode	Ambient Temperature Range		Charging time
	Min°C	Max°C	
On (I)	0-15°C	16-40°C	4hrs (full charge) Partial Charge
	0-35°C	36-40°C	
Off (O)	0-40°C		4hrs (full charge)