
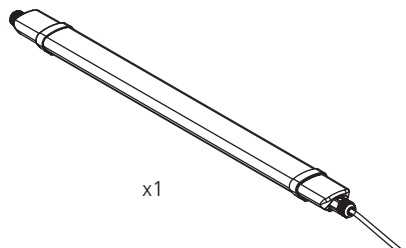




Model	L [mm]	W [mm]	H1 [mm]	H2 [mm]	A [mm]	B [mm]
0090230	754	53	35	40	-	370 ± 10
0090231	1284	53	35	40	481 ± 10	962 ± 10
0090232	1564	53	35	40	621 ± 10	1242 ± 10

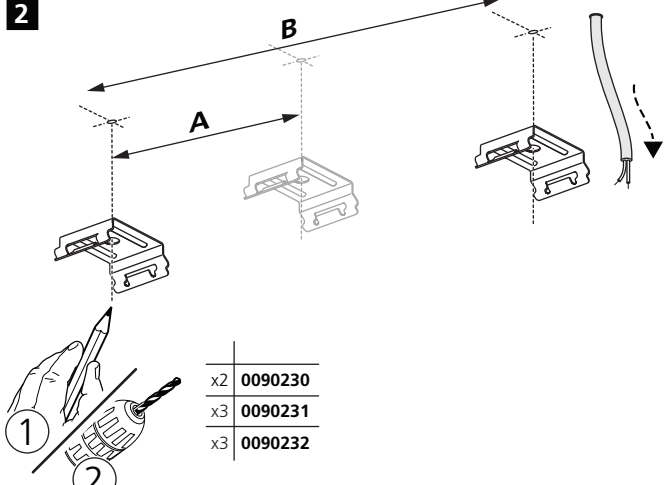



1





2

x2	0090230
x3	0090231
x3	0090232

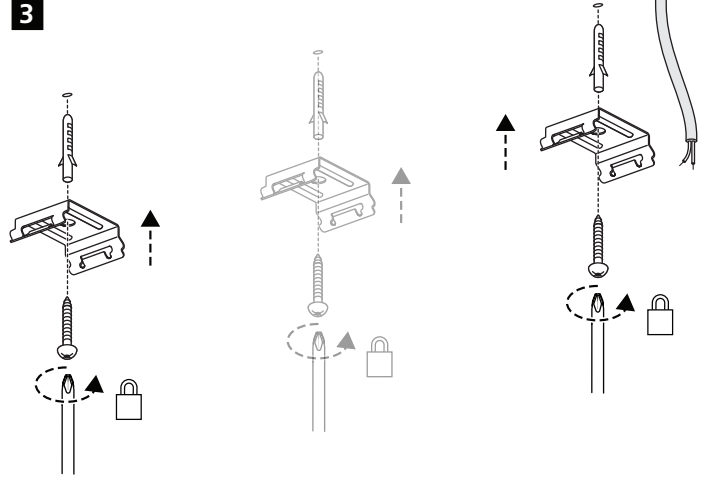3

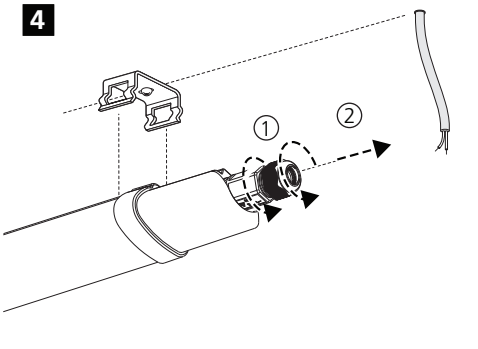
4

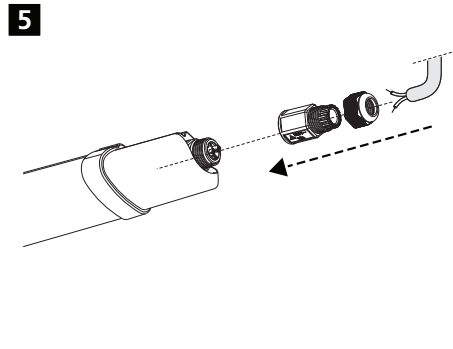5

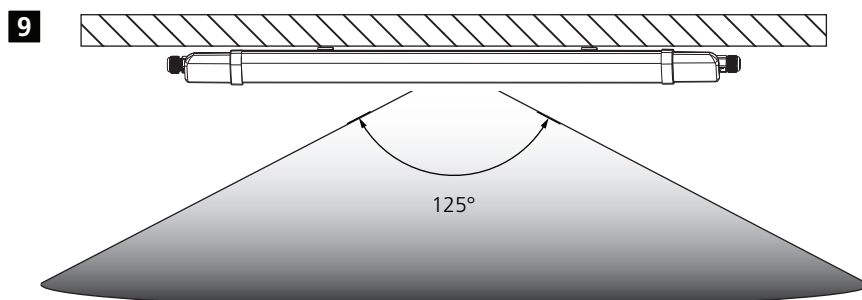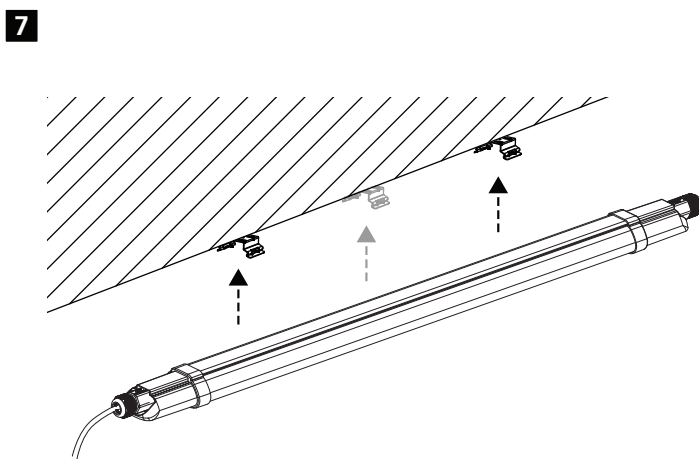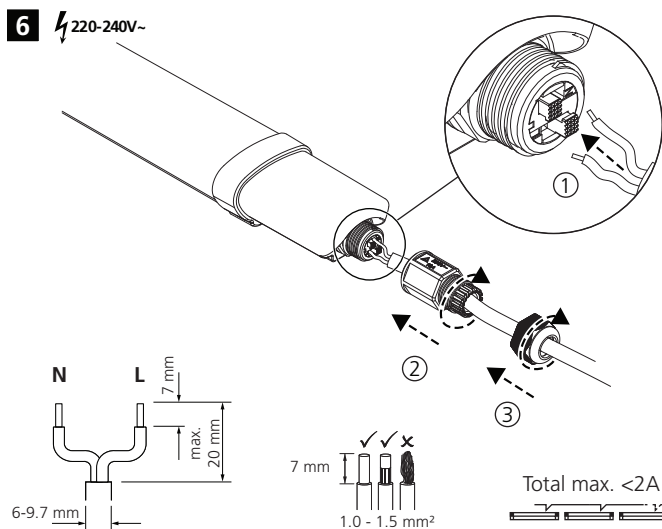


⚙️ **CCT Settings (3000K, 4000K, 6500K)**

Operation	Operation Time	Function
1x Instant Push		LED Light On
1x Instant Push	< 6.6 sec	LED Light Off
1x Instant Push	> 6.6 sec	CCT Changing
7x Instant Push	< 10 sec	Reset all luminaires to default setting (3000K)

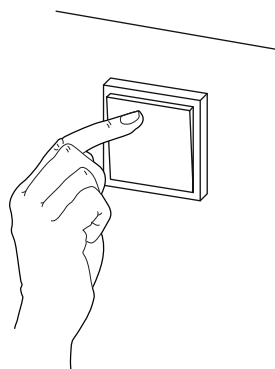

! Total max. <2A



Model	Max. number of interconnection [pcs]
0090230	12
0090231	11
0090232	7