


BULKHEAD COMPACT

BULKHEAD COMPACT SENSOR

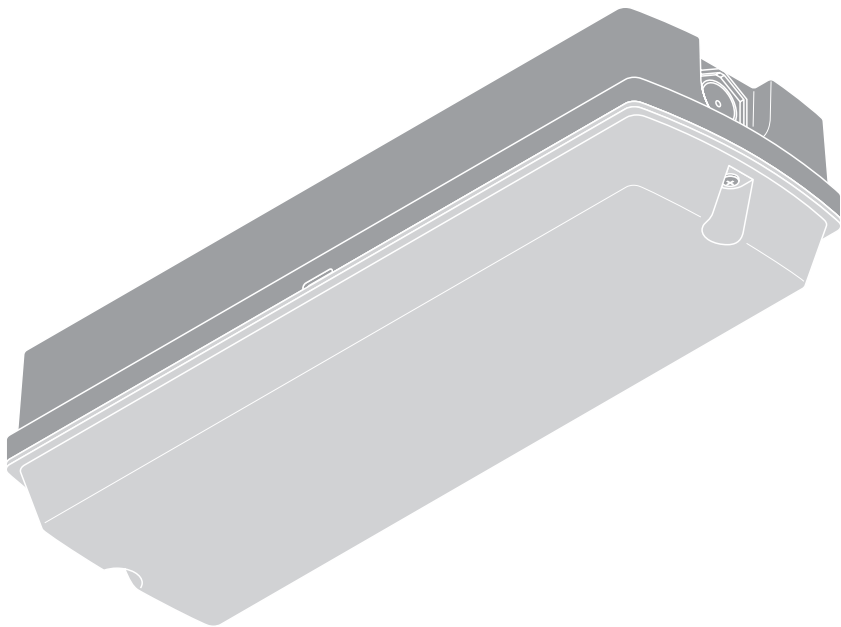

	EAN	l x w x h [mm]	W	V _{AC}	Hz	Im	Im/W	K
BLKH COMP RC V 8W ML 83040 BK	4099854290480	356 x 115 x 80	8*	220-240 V	50/60	840*	105*	3000/4000
BLKH COMP RC V 8W ML 83040 WT	4099854290503	356 x 115 x 80	8*	220-240 V	50/60	840*	105*	3000/4000
BLKH COMP RC SN V 9W ML 83040 BK	4099854290527	356 x 115 x 80	9*	220-240 V	50/60	840*	93*	3000/4000
BLKH COMP RC SN V 9W ML 83040 WT	4099854290602	356 x 115 x 80	9*	220-240 V	50/60	840*	93*	3000/4000






	EAN	IP	IK	∇	R _a	τ (°C)	PF	👤
BLKH COMP RC V 8W ML 83040 BK	4099854290480	65	10	125°	> 80	+5...+45	0.7	0.5 kg
BLKH COMP RC V 8W ML 83040 WT	4099854290503	65	10	125°	> 80	+5...+45	0.7	0.5 kg
BLKH COMP RC SN V 9W ML 83040 BK	4099854290527	65	10	125°	> 80	+5...+45	0.5	0.6 kg
BLKH COMP RC SN V 9W ML 83040 WT	4099854290602	65	10	125°	> 80	+5...+45	0.5	0.6 kg

*

BLKH COMP RC						
W	8		6		4	
T	4000	3000	4000	3000	4000	3000
Im	840	800	690	660	500	500
Im/W	105	100	115	110	125	125

*

BLKH COMP RC SN						
W	9		7		5	
T	4000	3000	4000	3000	4000	3000
Im	840	800	690	660	500	500
Im/W	93	88	98	94	100	100

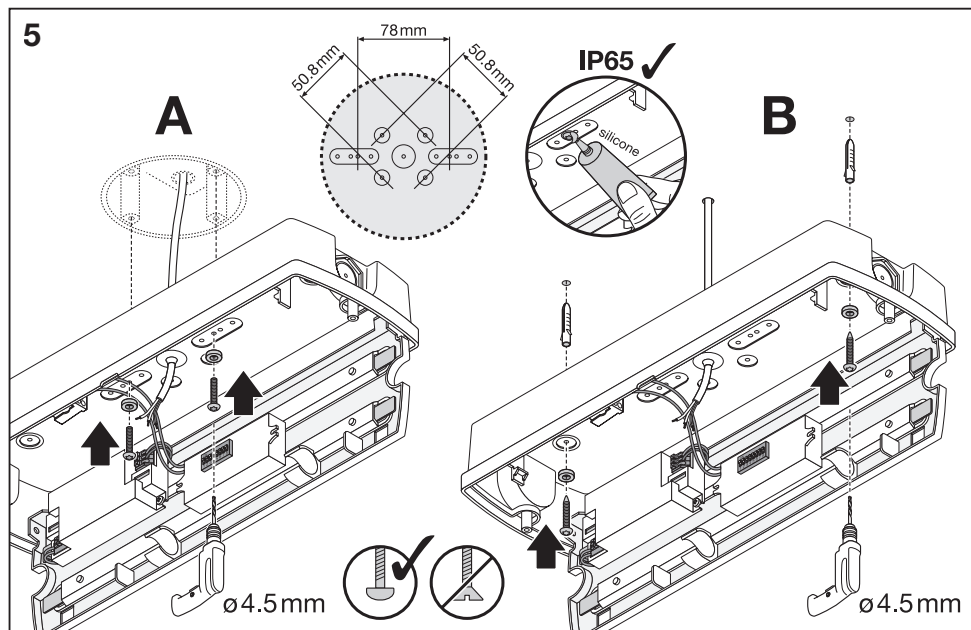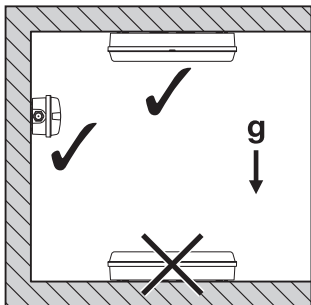


BULKHEAD COMPACT

BULKHEAD COMPACT SENSOR



BULKHEAD COMPACT SENSOR



ON OFF



Daylight Sensor


1	2	3	
ON	ON	ON	2LUX
-	ON	ON	10LUX
-	ON	-	30LUX
-	-	ON	50LUX
-	-	-	Disable

Hold Time

4	5	6	
ON	ON	ON	5s
ON	ON	-	30s
ON	-	ON	90s
ON	-	-	5min
-	ON	ON	20min
-	-	-	30min


Detection Area

7	8	
ON	ON	100%
ON	-	75%
-	ON	50%
-	-	25%

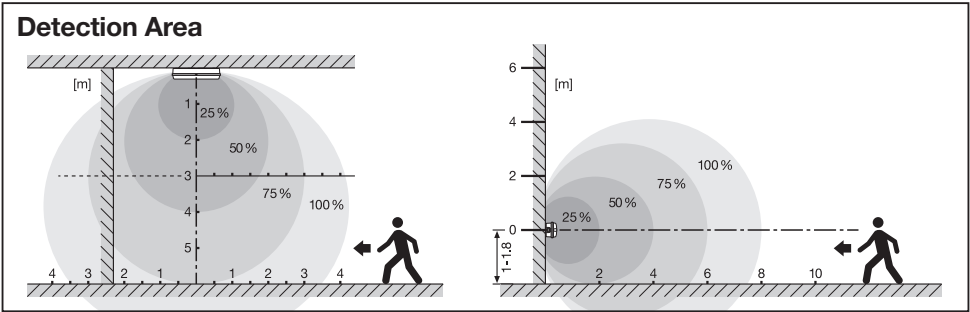


6

A

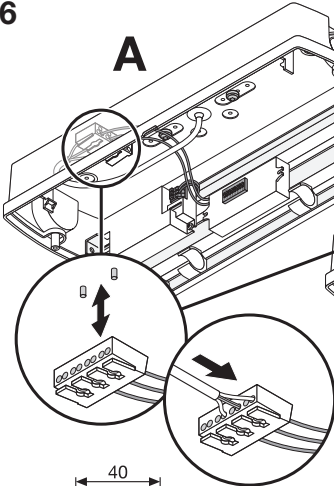

B


PG13.5

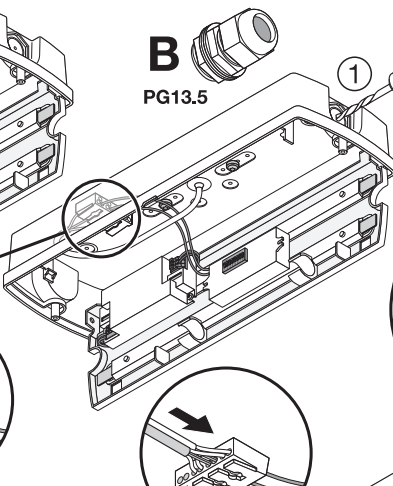


1



2



3



3.25Nm

IP65



40

30

12⁺¹

0.5-2.5mm²

ø6-13

N

E

L

L1

