
BULKHEAD COMPACT
BULKHEAD COMPACT SENSOR

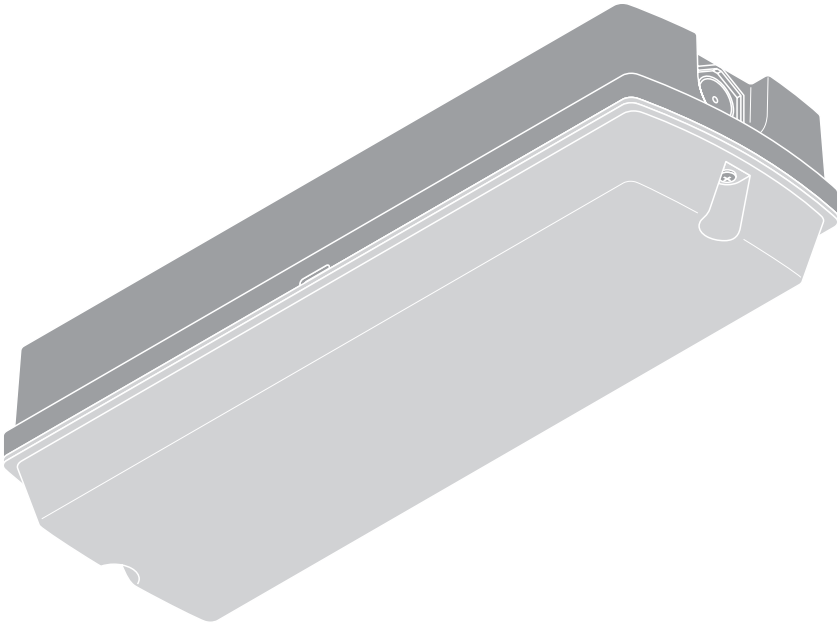

	EAN	l x w x h [mm]	W	V_{AC}	Hz	lm	lm/W	K
BLKH COMP RC V 8W ML 83040 BK	4099854290480	356 x 115 x 80	8*	220-240 V	50/60	840*	105*	3000/4000
BLKH COMP RC V 8W ML 83040 WT	4099854290503	356 x 115 x 80	8*	220-240 V	50/60	840*	105*	3000/4000
BLKH COMP RC SN V 9W ML 83040 BK	4099854290527	356 x 115 x 80	9*	220-240 V	50/60	840*	93*	3000/4000
BLKH COMP RC SN V 9W ML 83040 WT	4099854290602	356 x 115 x 80	9*	220-240 V	50/60	840*	93*	3000/4000

	EAN	IP	IK	▽	R_a	(°C)	PF	
BLKH COMP RC V 8W ML 83040 BK	4099854290480	65	10	125°	> 80	+5…+45	0.7	0.5 kg
BLKH COMP RC V 8W ML 83040 WT	4099854290503	65	10	125°	> 80	+5…+45	0.7	0.5 kg
BLKH COMP RC SN V 9W ML 83040 BK	4099854290527	65	10	125°	> 80	+5…+45	0.5	0.6 kg
BLKH COMP RC SN V 9W ML 83040 WT	4099854290602	65	10	125°	> 80	+5…+45	0.5	0.6 kg


*


BLKH COMP RC						
W	8		6		4	
T	4000	3000	4000	3000	4000	3000
lm	840	800	690	660	500	500
lm/W	105	100	115	110	125	125


*


BLKH COMP RC SN						
W	9		7		5	
T	4000	3000	4000	3000	4000	3000
lm	840	800	690	660	500	500
lm/W	93	88	98	94	100	100


BULKHEAD COMPACT
BULKHEAD COMPACT SENSOR
















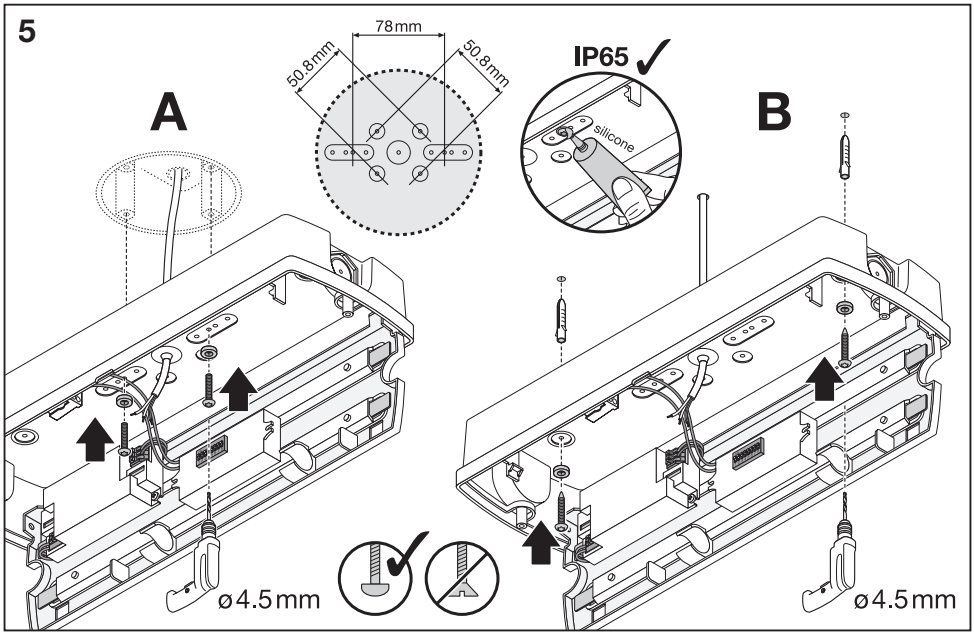

BULKHEAD COMPACT
BULKHEAD COMPACT SENSOR

BULKHEAD COMPACT SENSOR

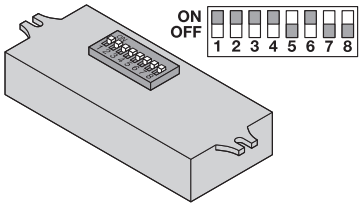

Daylight Sensor

1	2	3	
ON	ON	ON	2 LUX
–	ON	ON	10 LUX
–	ON	–	30 LUX
–	–	ON	50 LUX
–	–	–	Disable


Hold Time


4	5	6	
ON	ON	ON	5 s
ON	ON	–	30 s
ON	–	ON	90 s
ON	–	–	5 min
–	ON	ON	20 min
–	–	–	30 min


Detection Area


7	8	
ON	ON	100 %
ON	–	75 %
–	ON	50 %
–	–	25 %


Detection Area

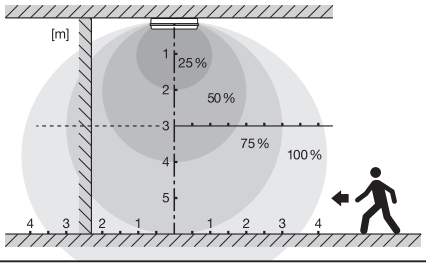


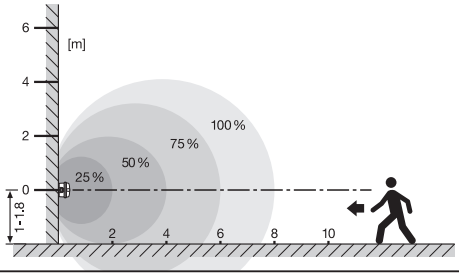


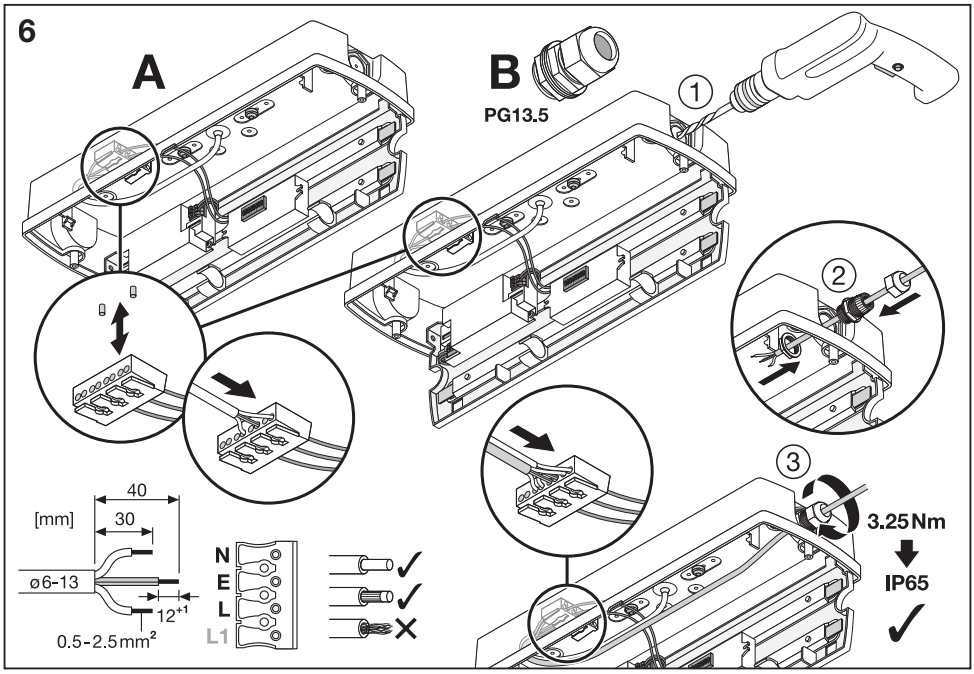


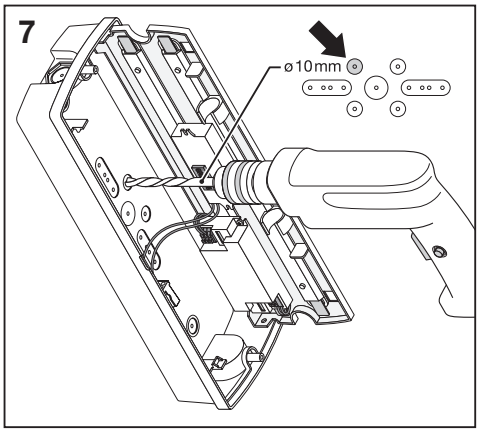


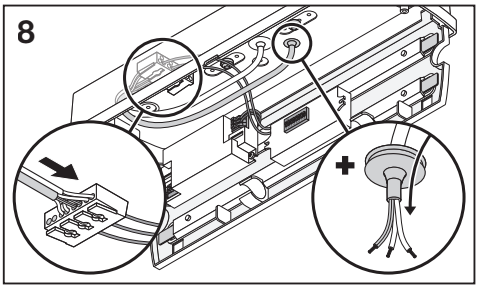


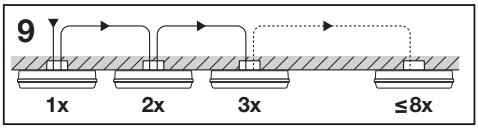

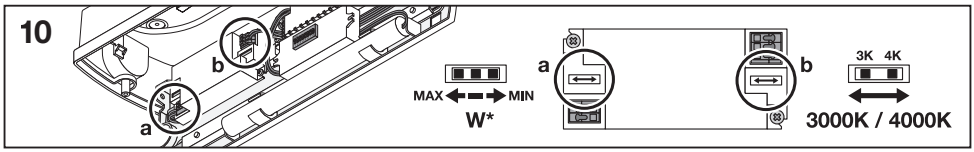







	B16	B10	C16	C10
BLKH COMP RC V 8W ML 83040 BK/WT	104	83	140	87
BLKH COMP RC SN V 9W ML 83040 BK/WT				





LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

GB LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom

C10449057
G11256084
08.10.25