


FLOODLIGHT GEN4 SENSOR





FLOODLIGHT GEN4 SENSOR

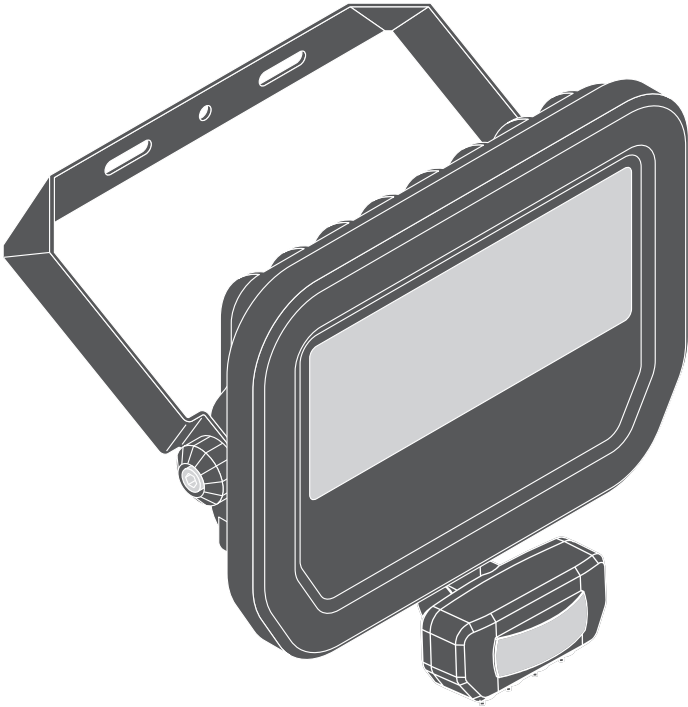


	EAN	l x w x h [mm]	W*	V _{AC}	Hz	lm*	lm/W	K
FL 10 SN P 8W 1K2LM 830 PS SY100 WT	4099854306709	136x170x56.5	8	220-240V	50/60Hz	1100	133	3000
FL 10 SN P 8W 1K2LM 830 PS SY100 BK	4099854306747	136x170x56.5	8	220-240V	50/60Hz	1100	133	3000
FL 10 SN P 8W 1K2LM 840 PS SY100 WT	4099854306785	136x170x56.5	8	220-240V	50/60Hz	1200	145	4000
FL 10 SN P 8W 1K2LM 840 PS SY100 BK	4099854306808	136x170x56.5	8	220-240V	50/60Hz	1200	145	4000
FL 20 SN P 17W 2K4LM 830 PSSY100 WT	4099854309465	157x183x56.5	17	220-240V	50/60Hz	2200	133	3000
FL 20 SN P 17W 2K4LM 830 PSSY100 BK	4099854309489	157x183x56.5	17	220-240V	50/60Hz	2200	133	3000
FL 20 SN P 17W 2K4LM 840 PSSY100 WT	4099854309502	157x183x56.5	17	220-240V	50/60Hz	2400	145	4000
FL 20 SN P 17W 2K4LM 840 PSSY100 BK	4099854309526	157x183x56.5	17	220-240V	50/60Hz	2400	145	4000
FL 50 SN P 41W 6KLM 830 PS SY100 WT	4099854306822	201x219x56.5	41	220-240V	50/60Hz	5500	133	3000
FL 50 SN P 41W 6KLM 830 PS SY100 BK	4099854306860	201x219x56.5	41	220-240V	50/60Hz	5500	133	3000
FL 50 SN P 41W 6KLM 840 PS SY100 WT	4099854306884	201x219x56.5	41	220-240V	50/60Hz	6000	145	4000
FL 50 SN P 41W 6KLM 840 PS SY100 BK	4099854306921	201x219x56.5	41	220-240V	50/60Hz	6000	145	4000




	EAN	IP	IK	◀	R _a	° (°C)	PF	👤
FL 10 SN P 8W 1K2LM 830 PS SY100 WT	4099854306709	65	07/05	100°	≥80	-30...+50	> 0.9	0.5 kg
FL 10 SN P 8W 1K2LM 830 PS SY100 BK	4099854306747	65	07/05	100°	≥80	-30...+50	> 0.9	0.5 kg
FL 10 SN P 8W 1K2LM 840 PS SY100 WT	4099854306785	65	07/05	100°	≥80	-30...+50	> 0.9	0.5 kg
FL 10 SN P 8W 1K2LM 840 PS SY100 BK	4099854306808	65	07/05	100°	≥80	-30...+50	> 0.9	0.5 kg
FL 20 SN P 17W 2K4LM 830 PSSY100 WT	4099854309465	65	07/05	100°	≥80	-30...+50	> 0.9	0.6 kg
FL 20 SN P 17W 2K4LM 830 PSSY100 BK	4099854309489	65	07/05	100°	≥80	-30...+50	> 0.9	0.6 kg
FL 20 SN P 17W 2K4LM 840 PSSY100 WT	4099854309502	65	07/05	100°	≥80	-30...+50	> 0.9	0.6 kg
FL 20 SN P 17W 2K4LM 840 PSSY100 BK	4099854309526	65	07/05	100°	≥80	-30...+50	> 0.9	0.6 kg
FL 50 SN P 41W 6KLM 830 PS SY100 WT	4099854306822	65	07/05	100°	≥80	-30...+50	> 0.9	0.9 kg
FL 50 SN P 41W 6KLM 830 PS SY100 BK	4099854306860	65	07/05	100°	≥80	-30...+50	> 0.9	0.9 kg
FL 50 SN P 41W 6KLM 840 PS SY100 WT	4099854306884	65	07/05	100°	≥80	-30...+50	> 0.9	0.9 kg
FL 50 SN P 41W 6KLM 840 PS SY100 BK	4099854306921	65	07/05	100°	≥80	-30...+50	> 0.9	0.9 kg

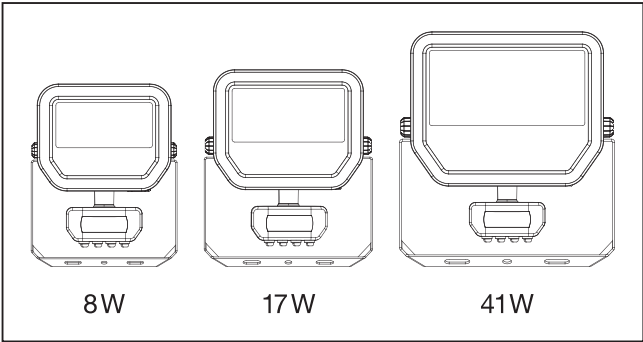








FLOODLIGHT GEN4 SENSOR



							230 Vac		
		A	B	C					
8 W		68	48	5.5	2x M4	0.014 m²	67	84	107
17 W		78	58	6.5	2x M5	0.017 m²	60	75	96
41 W		108	78	8.5	2x M6	0.027 m²	15	19	25

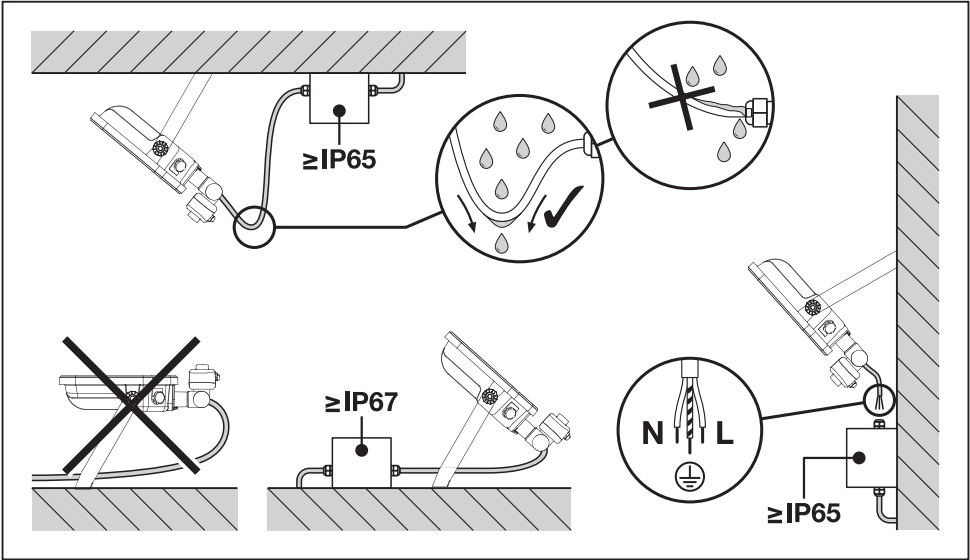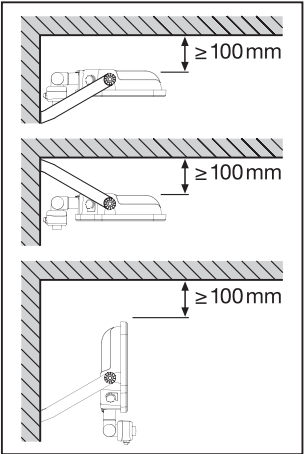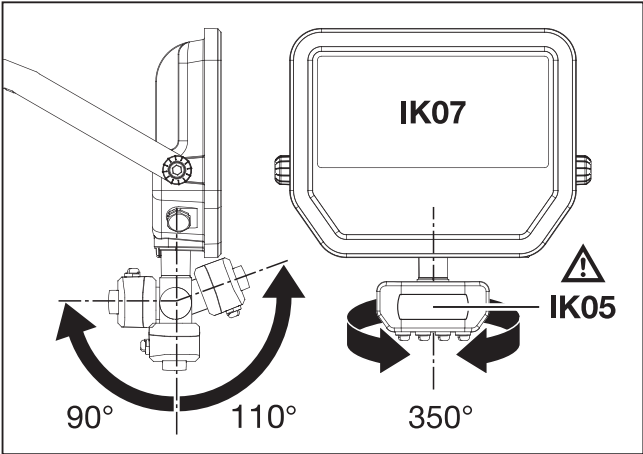

FLOODLIGHT GEN4 SENSOR

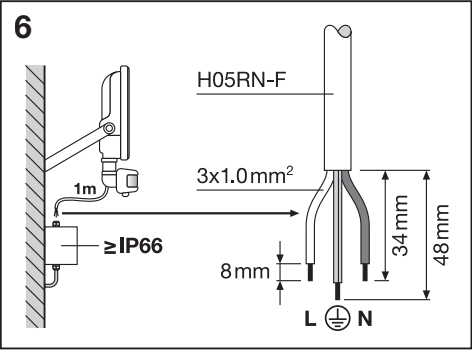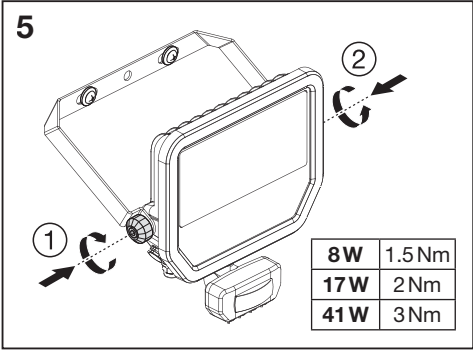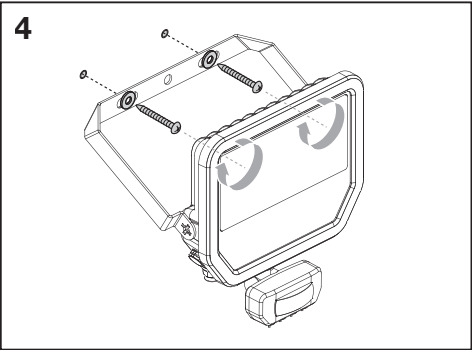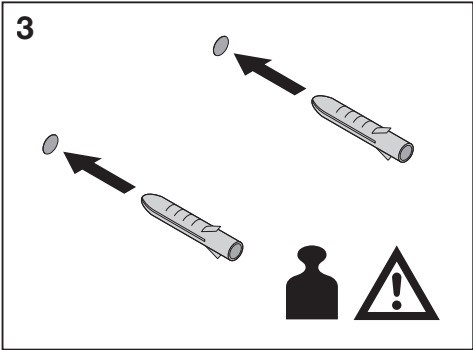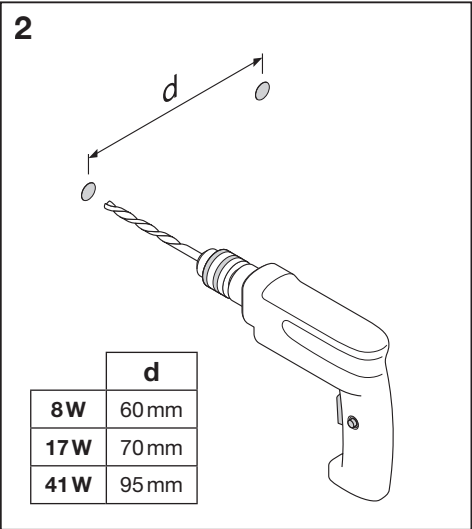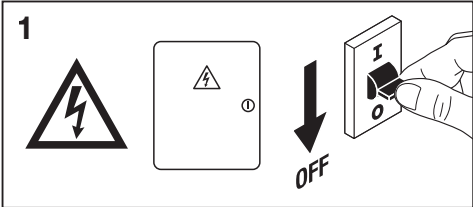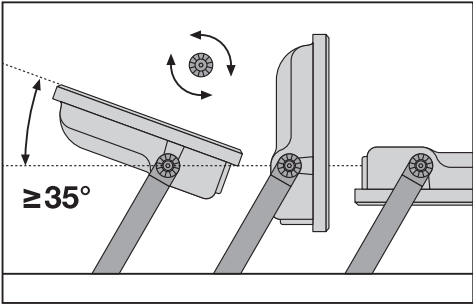

FLOODLIGHT GEN4 SENSOR



7

FL 10 SN P 8W 1K2LM 830 PS SY100	6 W / 780 lm	8 W / 1100 lm
FL 10 SN P 8W 1K2LM 840 PS SY100	6 W / 850 lm	8 W / 1200 lm
FL 20 SN P 17W 2K4LM 830 PS SY100	11 W / 1465 lm	17 W / 2200 lm
FL 20 SN P 17W 2K4LM 840 PS SY100	11 W / 1600 lm	17 W / 2400 lm
FL 50 SN P 41W 6KLM 830 PS SY100	27 W / 3670 lm	41 W / 5500 lm
FL 50 SN P 41W 6KLM 840 PS SY100	27 W / 4000 lm	41 W / 6000 lm

Daylight sensor functionalities²⁾

FLOODLIGHT GEN4 SENSOR



LUX

	<60lux → ON >60lux → OFF
	<100lux → ON >100lux → OFF
	<2000lux → ON

TIME



	~10 sec ±3sec
	~1 min ±30sec
	~6 min ±1min
	~12 min ±2min

SENS


	OFF (Example 4)
	~2m
	~6m
	~12m

DIM



	→ OFF
	<60lux → 20 % >60lux → OFF
	<60lux → 40 % >60lux → OFF

Example 1

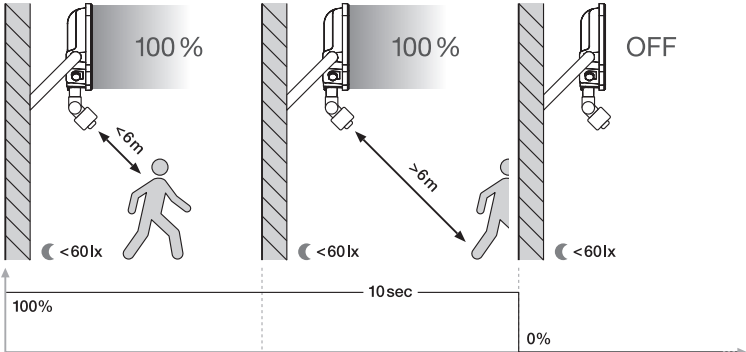

FLOODLIGHT GEN4 SENSOR

